


# structo

WALL  
SYSTEMS

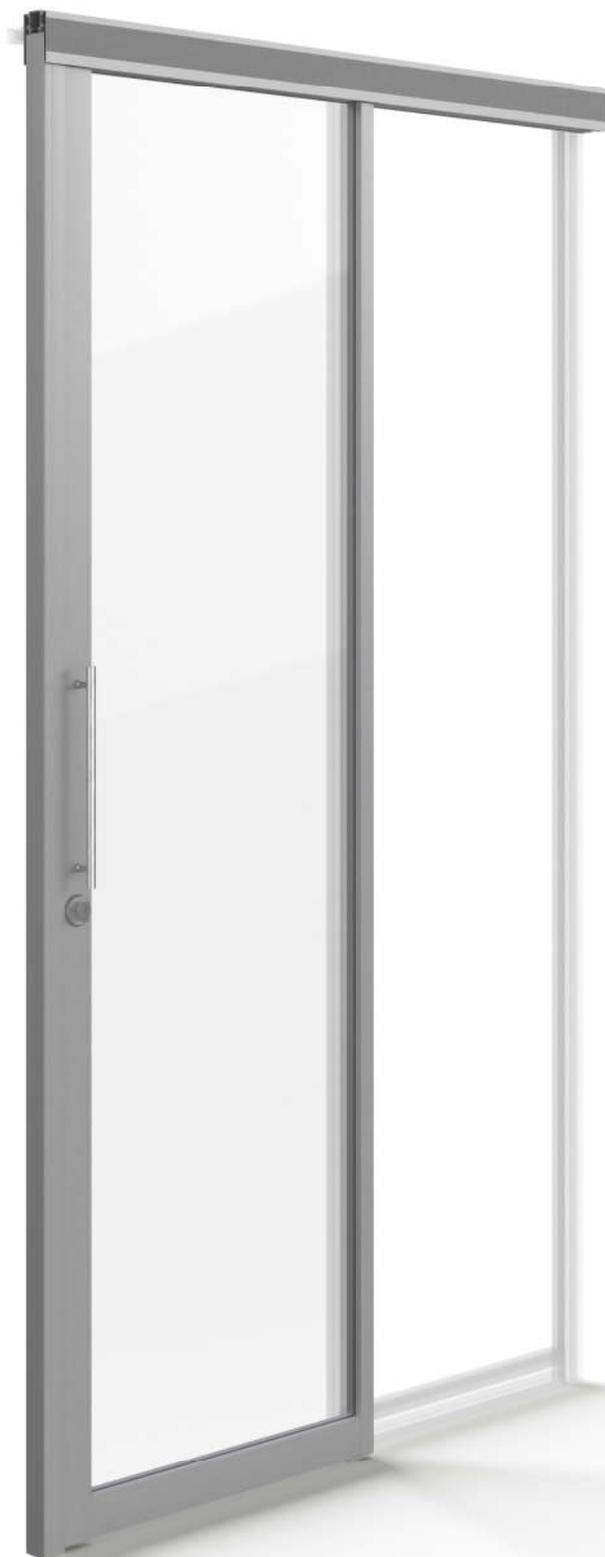

FITS PERFECTLY WITH GLASS  
WALLS

## TOPSLIDE- **S32**

Maximum door height: **2800 mm\***

\* with 6mm glass if width is max 1200mm

Maximum door width: **1500 mm\***

\* with 6mm glass if height is max 2300mm

Suitable glasses with a  
thickness: **6 – 8,76 mm**



+372 666 5017



info@structo.ee



www.structo.ee

TOPSLIDE-S32 is an aluminum framed sliding door (single or pair) for glasses between 6 - 8,76mm.

The standard surface finish of aluminum profiles is natural (silver) anodizing, but it is also possible to order a painted surface according to the RAL colour catalogue.

Possible types of glass are tempered, laminated or tempered-laminated.

The surface of the glass can be bright, very bright, mass-tinted, background-painted or matte.


It's possible to use thin 15x30mm aluminum H-profiles to divide one glass panel into several panels. That enables to use different materials in the door panels, which can give the door panel an exciting and contrasting look.

Standard lock cases are ASSA 13787-28, Abloy 306-30 or Valnes E9790-30, but it is possible to use different lock cases. Other hardware (cylinder and/or twist knob must be compatible with chosen lock case).

Standard handle is a pull handle (SE-300/15), but it is also possible to use other handles.

The structures adjacent to the product must be strong enough to allow profiles to be attached to them.

Maximum door height:	<b>2800 mm*</b>
* with 6mm glass if width is max 1200mm	
Maximum door width:	<b>1500 mm*</b>
* with 6mm glass if height is max 2300mm	
Suitable glasses with a thickness:	<b>6 – 8,76 mm</b>

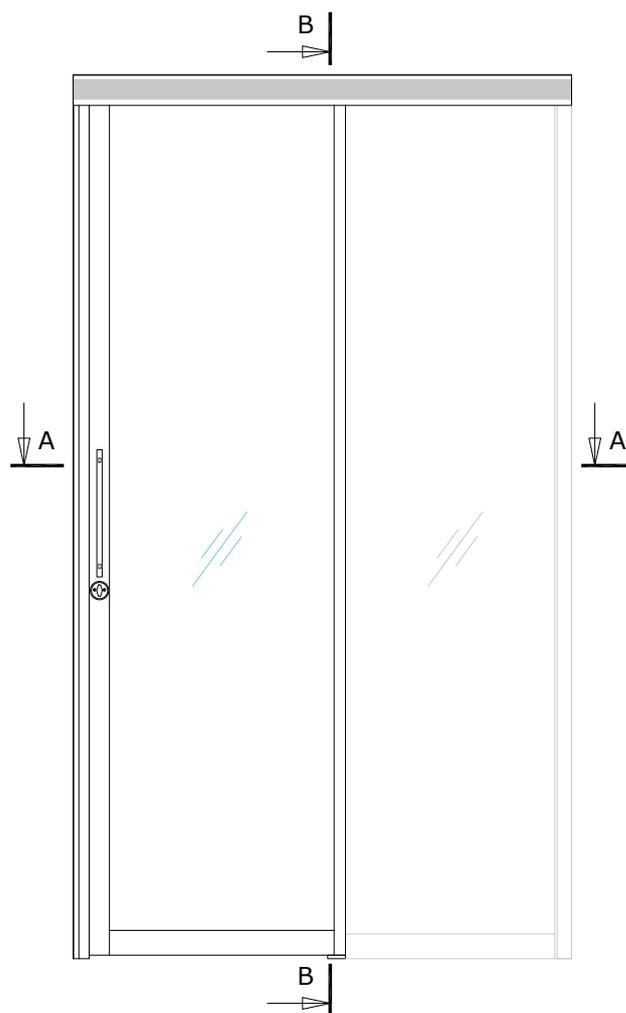

TOPSLIDE-


S32

STANDARD SOLUTION




CONNECTION WITH CEILING

B-B

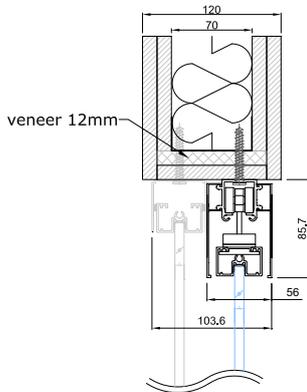


CONNECTION WITH CEILING  
WITH OVERLIGHT

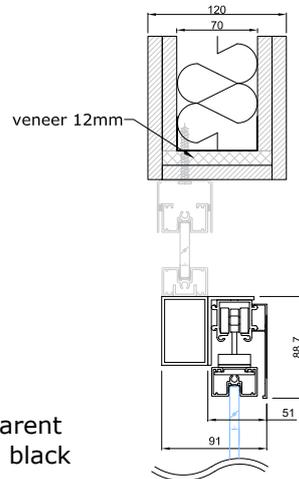


☐ - seal, LU6, transparent  
P - P-seal 5,5\*9mm, black

CONNECTION WITH FLOOR


B-B




OPTIONAL HORIZONTAL MIDDLE  
CONNECTION WITH H-PROFILE FOR  
CONNECTING DIFFERENT MATERIALS




CONNECTION WITH WALL (WITH LOCKING AND PULL HANDLES)

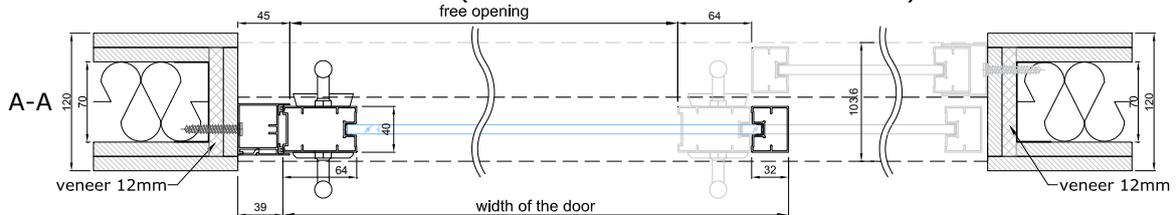


CONNECTION WITH WALL (WITH BUILT-IN HANDLES)

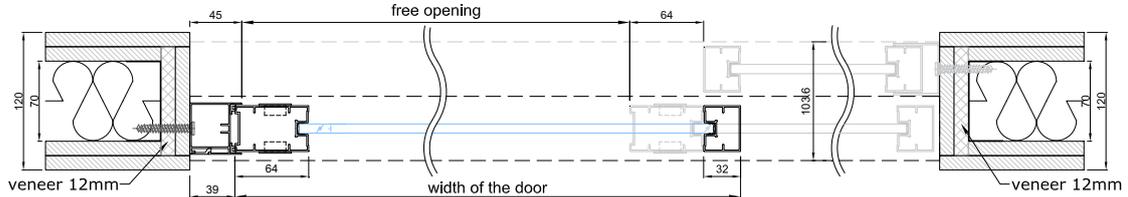


CONNECTION WITH WALL (WITH BUILT-IN HANDLES AND  
WITHOUT STRIKER PROFILE)

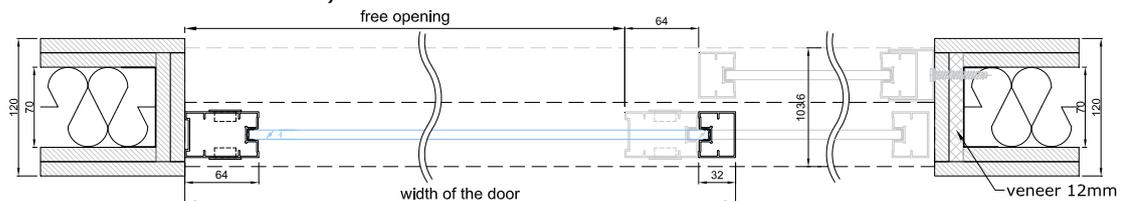


CONNECTION WITH CEILING

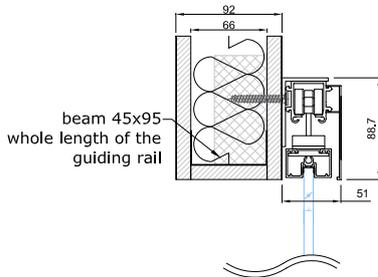

OPTIONAL HORIZONTAL MIDDLE  
CONNECTION WITH H-PROFILE FOR  
CONNECTING DIFFERENT MATERIALS




CONNECTION WITH FLOOR



- ☐ - seal, LU6, transparent
- Ⓟ - P-seal 5,5\*9mm, black

CONNECTION WITH WALL (WITH LOCKING AND PULL HANDLES)

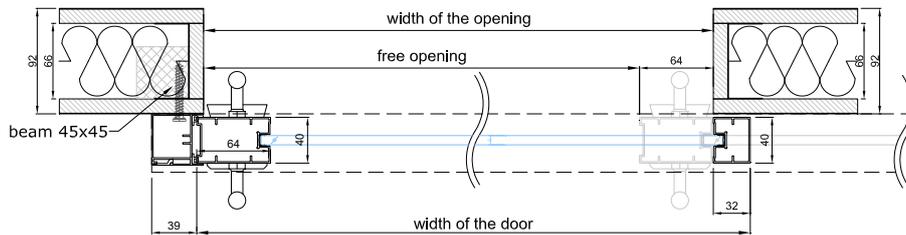

CONNECTION WITH WALL (WITH BUILT-IN HANDLES)

